

EN54

EN54 FireProtect Jeweller sounders and VADs

Tech specs 

Where to buy

Tech specs

EN54 LINE

EN54 FireProtect (VAD) Jeweller

Wireless addressable visual fire alarm device (VAD)



Device compatibility

Check

Communication

⌚ Jeweller communication technology

Proprietary wireless communication technology to transmit commands, alarms, and events.

Key features:

- Two-way communication.
- Advanced sabotage protection.
- Block encryption featuring a dynamic key.
- Instant notifications.
- Remote control and configuration in Ajax apps.

[Learn more](#) >

Frequency bands

866.0 – 866.5 MHz

868.0 – 868.6 MHz

868.7 – 869.2 MHz

905.0 – 926.5 MHz

915.85 – 926.5 MHz

921.0 – 922.0 MHz

Depends on the sales region.

Maximum effective radiated power (ERP)

up to 20 mW

Automatic power control to reduce power consumption and radio interference.

Radio signal modulation

GFSK

Radio communication range

up to 1,700 m

Between the device and control and indicating equipment (CIE) or a range extender in an open space.

[Calculate radio communication range at the facility](#) >

Encrypted communication

All stored and transmitted data is protected by block encryption featuring a dynamic key.

Frequency hopping

To prevent radio interference and jamming.

[Learn more](#) >

Alarm annunciation

Alarm type

light

LED frame.

Flash frequency

90 ms ON / 1,910 ms OFF (cycle duration: 2,000 ms; frequency: 0.5 Hz)

Alarm annunciation test

To check the visual alarm signal to ensure fire alarm signals are visible in the premises.

Installation recommendations

The device's recommended installation height is up to 3 m on the ceiling and up to 2.4 m on the wall.

The device is designed for outdoor and indoor use.

Sabotage protection

Tamper button


Fault notification when an attempt is made to remove the device from the mounting panel.

[Learn more](#)

Lock for SmartBracket

to secure the device on the SmartBracket mounting panel

When locked, the lock secures the device and prevents it from being removed without a special tool.

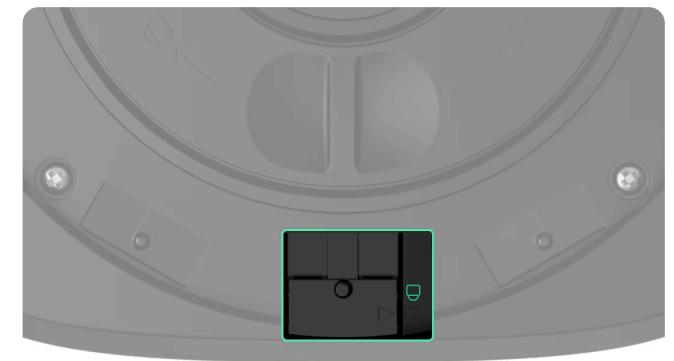

Protection against spoofing

device authentication

Connection loss detection

after 36 s

Detection time depends on Jeweller settings.

Power supply

Battery

4 × CR123A

Pre-installed.

Tool-free battery replacement

To replace the batteries, turn the battery compartment cover counterclockwise.



Reverse polarity protection

Prevents device damage if the batteries are put in incorrectly.

Recommended battery type

Huiderui CR123A; 3 V; 1,600 mAh,
 LiMnO_2

Calculated battery life

up to 5 years

Enclosure

Dimensions

145 × 145 × 51 mm



Weight

509 g



Operating temperature range

from −10 °C to +60 °C

Operating humidity

up to 80%

Protection class

IP54

Flammability rating

UL 94 V-0

Color

Black



White



Red



Complete set

EN54 FireProtect (VAD) Jeweller

4 × CR123A battery (pre-installed)

SmartBracket mounting panel

Installation kit

Quick start guide

Revision

1

Certification and compliance with standards



EN54 FireProtect (VAD) Jeweller



[Additional information](#)

[Compliance with standards](#)

[User manual](#)

[Learn more >](#)[Learn more >](#)

Warranty

24 months

[Learn more >](#)

Products

Intrusion protection
Video surveillance
Fire and life safety
Comfort and automation
All products
Services
System integrations
Ajax Ready products
Fibra wired protocol
Ajax radio protocols

Software

For users
Ajax PRO: Tool for Engineers

Solutions

Customer stories
Solutions by facility type
Commercial fire detection and alarm system
Upgrades and retrofits
Why Ajax
How it works

Support

Manuals and articles
Compliance with standards

Tools

Ajax device compatibility

Company

Blog
About us
Press page
Events
Career
Ajax Next
Students at CES 2026
Reviews and feedback

For partners

For partners
Ajax Academy
Partner Portal

Subscribe

Subscribe to our emails about secure life. No spam.

[Subscribe](#)

Request extra help

✉ support@ajax.systems
.telegram @AjaxSystemsSupport_Bot
💬 Send a request



4,000,000

people worldwide under Ajax protection

Rating 4.7

[Ajax Desktop](#)[Video storage calculator](#)[Ajax PRO Desktop](#)[Video device calculator](#)[Ajax Translator PRO](#)[Battery life calculator](#)[Ajax Cloud Signaling](#)[Radio communication range calculator](#)[Scenarios](#)[Switches and outlets configurator](#)[Available on App Store](#)[Fibra power supply calculator](#)[Available on Google Play](#)[All web tools](#)

Connecting to CMS

[Intrusion alarm monitoring](#)[Video monitoring and visual alarm verification](#)[Audio alarm verification](#)[Report mistake](#)[Suggest a feature](#)[Hrvatska](#)[Privacy policy](#)[Report a vulnerability](#)[GDPR White Paper](#)[NDAA Statement](#)[Cookie policy](#)[Anti-Spam Policy](#)

© 2025 AJAX SYSTEMS CH. All rights reserved

[End user agreement](#) [Warranty](#)