

Anti-panic button • Series 484

- Silent operation
- Protection against opening
- Version with LED memory




Reed button designed for the silent signalling of robberies in action. By pushing the button, a magnet gets close to the internal reed and opens the contact, thus triggering the alarm. Self-protection against opening through internal reed. Internal reeds are designed for NC operation. Simplified installation thanks to the two-sided tape included. The button is approved IMQ Lev. III and PPTT. Version 484-I is equipped with self-retaining button.

General specifications

Cover material	Anodized steel
Housing material	Thermoplastic, white colour
Operation	NC reed contact
Type of connection	Terminals
Operating temperature	+5°C÷+40°C
IP Degree	IP 32
Standard equipment	Two-sided fixing tape. Reset key for 484-I
Packaging	1 pc. / package



To reset, a specific key included in the package is necessary.
 4-terminal connection: 2 for contact and 2 for anti-tampering.
 Version 484-ME: LED memory with central reset (by cutting power supply), button with spring return.
 6-terminal connection: 2 for contact, 2 for anti-tampering, 2 for 12 Vdc power supply.

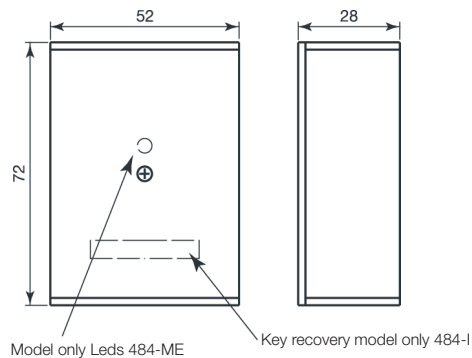

Order codes

Code	Connection type	Max voltage	Max current	Max power	Power supply	LED memory	Connections	Approvals	Package weight	Notes
484-I	NC	75 Vdc	1 A	10 W	-	No	4 terminals	PPTT - IMQ Liv. III	0,07 Kg	Key reset
484-ME	NC	75 Vdc	1 A	10 W	12 Vdc - 10 mA	Yes	6 terminals	PPTT - IMQ Liv. III	0,07 Kg	Central reset

Accessories available

CSA05403 | Spare key for 484-I

