



LLH
LLHST
LLH23



Luminous alarm signs

The extinguisher system allows the possibility of including extinguisher signs.

As the triggering of an extinguishing system may entail certain risks and dangers, the function of the extinguisher sign is to warn the staff of the areas sensitive to the imminent triggering of the system or when the system has been triggered.

Three types of extinguisher signs are available:

- 1) LLHST: Device with acoustic and luminous warning function.
- 2) LLH: Device with acoustic, luminous and informative sticker warning function.
- 3) LLH23: Device with EN 54-3 acoustic and EN 54-23 luminous functions and adhesive sticker warning.

The third device must always be used in such installations that do not have other EN 54-3 and EN 54-23 fire warning devices.

LLH and LLHST LUMINOUS SIGNS


Signs to be connected directly to the outputs of the control panels or to the relay modules.
With indicator sticker.

Operating voltage	12-30 Vdc
Maximum consumption	80 mA at 30 Vdc
Power	80 dB at 1 m
IP protection	IP40
Standard	EN 60598, EN 60598-2-1, EN 61547, EN55015
Temperature	0 to 40°C
Humidity	95% RH
Dimensions	262 x 100 x 51 mm
Weight	340 gr
Jumper	fixed / intermittent illumination Active / non-active buzzer


LLH23 LUMINOUS SIGN

Optic acoustic alarm sign certified as per EN 54-3 and EN 54-23. Available with several selectable audio tones.

Nominal voltage	24 Vcc
Consumption	82 mA at 30Vdc
Category	W-3,6-9
Power	71 - 91 dB
IP protection	IP21C
Standard	EN 54-3 / EN 54-23
Temperature	-10°C to +55°C

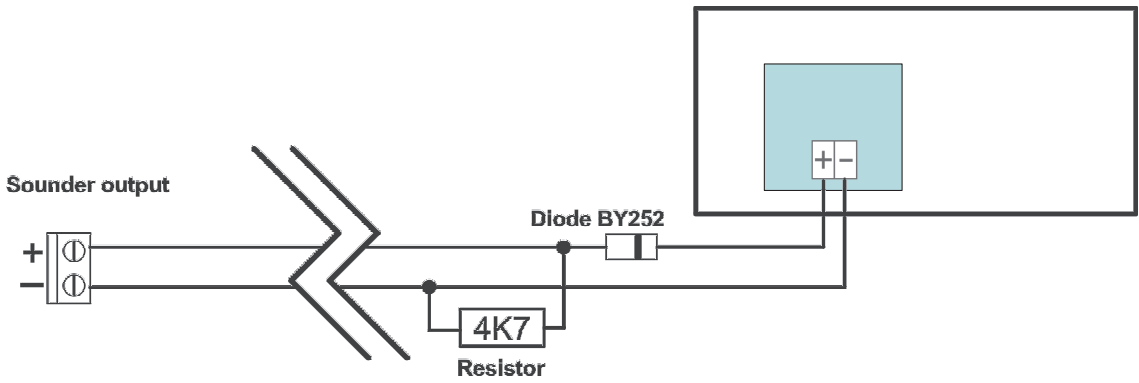

LLH / LLHST diagram

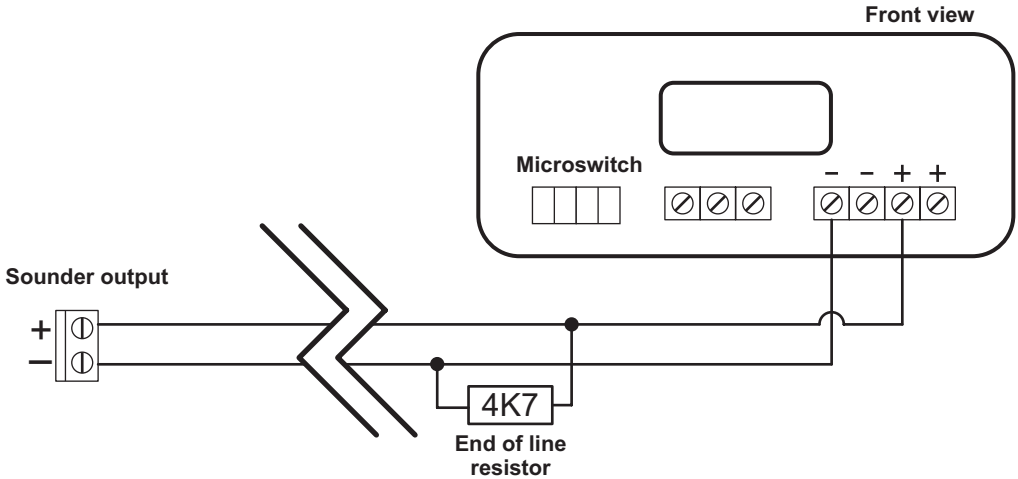

LLH23 diagram

Note: The LLH23 sign has the diode incorporated