

P ▲ R ▲ G ▲ D ▲ O ▲ X™ NV37MX

Installation Manual V1.0 BETA

Outdoor/Indoor Window and Sliding Door
Dual Detector with Anti-Masking and Pet
Immunity



General Description

Thank you for choosing the NV37MX for your professional protection needs. The NV37MX EVO version will provide you the most advanced window and sliding door protection either in Pet Immune or Sharp mode, while programming can be done remotely via EVO bus connection. If you have any comments please write to us at Paradox.com/products/feedback.

Pet Recommended Installation (please read)

The NV37MX has been designed to be installed within the frame of windows and doors when installed outdoors. Make sure that the unit is not directly exposed to rain; this will ensure the best performance against false alarms when random pets such as birds, cats and small dogs access the window sill. Other installation methods can be used with the NV37MX such as wall beam protection but if installed outside of the frame its pet immunity may be compromised.

Installing the NV37MX

1. Remove the NV37MX front cover - open the Captive screw.




Figure 1 – Removing the Front Cover

Figure 2 – Main Unit

Figure 3 – Back Plate

2. Remove the Main Unit: open the two snap-lock mechanisms on each side of the back cover attaching the Main Unit to the back cover as displayed below. Then remove the Main Unit.
3. Pull the wires from the control panel through the knockout holes and mount the back cover onto the window frame or wall using screws.

Note: PLEASE KEEP AT LEAST 4 cm / 1.5 in. clearance from window/shutter.

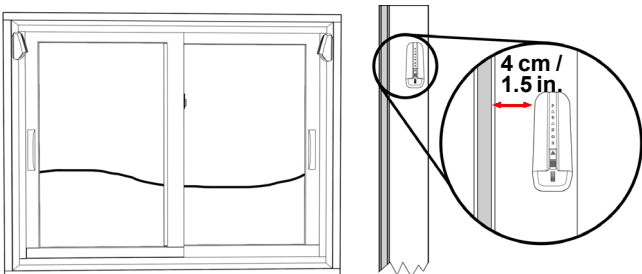

An optional mounting bracket for the NV37MX is available for ordering, part number: SB35.

4. Attach the Main Unit to the back cover - ensure the locks snap closed.

5. Connect the wires to the terminal blocks according to the following wiring assignment.

Table 1: Wiring Assignment

Terminal Connector	Recommended Wiring Assignment	
	Bus Label	Wire Color
1	12V+	Red
2	Minus (-)	Black
3	Data	Green
4	Clock	Yellow

6. Replace the front cover and close the Captive screw.

Note: PLEASE KEEP AT LEAST 4 cm / 1.5 in. clearance from window/shutter.

Do not obscure the detector's field of view.

Programming the NV37MX via Keypad or BabyWare

Via Keypad

1. Enter EVO Installer Programming Mode, programming section 4003.
2. Enter the detector's 8-digit **Serial Number**. Enter the 3-digit Section as per Table 2.

Table 2

Section [001]:

Bit	Function	Status/Description
[1]	LED Display Alarm	ON: Enabled (default) OFF: Disabled
[3]	LED Display Trouble	ON: Enabled (default) OFF: Disabled
[5]	Anti-mask	ON: Enabled (default) OFF: Disabled
[6]	Anti-mask Sensitivity	ON: High (default) OFF: Low

Table 3

Section [002]:

Bit	Function	Status/Description
[1]	Unit Tamper	ON: Enabled (default), OFF: Disabled
[2]	Wall Tamper	ON: Enabled (default), OFF: Disabled
[3]	PET Immunity	ON: Enabled (default) (PET Mode) OFF: Disabled (SHARP Mode)

Section [003]: 00 (Low), **01 (Medium)**, 02 (High)

Via BabyWare

1. Double-click the serial number of the NV37MX to open the detector's programming.
2. Configure the required settings.

Testing the NV37MX

Perform a Walk-Test to test successful installation: Walk slowly across the far end of the detection range. Ensure detection.


Walk test mode lasts 5 minutes after the tamper screw is closed.



Beam Pattern


PET Mode

SIDE VIEW:

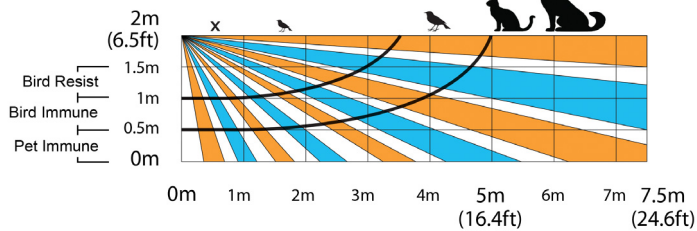


SHARP Mode

SIDE VIEW:

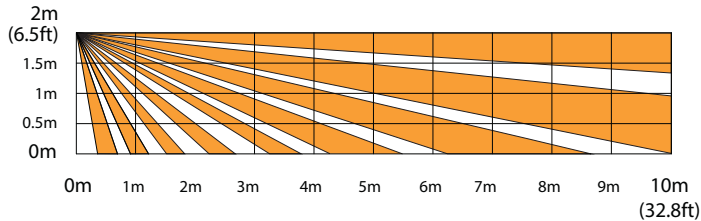

Top View

TOP VIEW:

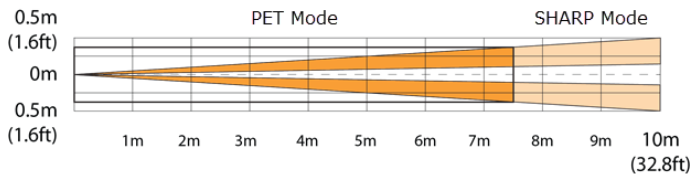

LED Display

Feature	LED Status Indicator
Tamper open	Green: ON for 0.3 seconds every 30 seconds
PIR sensitivity level setting	Green: Flashes 1-3 times according to the selected level
Alarm detection	Red: ON for 2 seconds
Booting/Tamper close	Green/Red alternating flashes for 30 seconds
Anti-mask detection	Flashing Orange: Pre-mask situation is detected. Orange LED flashes ON/OFF 3 times. Solid Orange: Real mask is detected (can take between 20 -150 seconds after the pre-mask situation). Orange LED will remain solid "ON" while mask is present.

Technical Specifications

Model Number	NV37MX
Infrared Sensor type	2 Dual elements
Detection range	<ul style="list-style-type: none"> • PET Immunity mode: 7.5m x 2m (25 x 7 ft) • Sharp mode: 10 x 2m (33 x 7 ft)
Super Pet Immunity	Pet size approximately 50cm
Anti- mask	Active IR detection for blocking 30cm and sprayed liquid
Input voltage	10 to 15 VDC
Current consumption	Typical: 15mA Maximum: 19.2mA
Compatibility	EVO systems
Outdoor protection	IP54
Operation temperature	-35°C to +50°C
Relative humidity	95% non-condensing
Dimensions	12.3 x 6.1 x 4.3 cm (4.8 x 2.4 x 1.7 in.)
Certifications	CE, EN50131-2-2 Grade 3, Class IV
Weight	100g / 0.2 lb



Warranty

For complete warranty information on this product, please refer to the Limited Warranty Statement found on the website: www.paradox.com/terms or contact your local distributor. Specifications may change without prior notice.

Patents

US, Canadian and international patents may apply. Paradox is a trademark or registered trademark of Paradox Security Systems (Bahamas) Ltd.

