


Intelligent Sounder Base

The intelligent sounder base is a low profile base sounder which is designed around a fully digital protocol and has a 240 device loop capacity. The acoustic output is selected from the control panel and the sounder activates its acoustic output following the triggering of an alarm condition on the host detector.

Once installed onto a compatible loop the device is fully addressable and benefits from an extensive range of intelligent functionality, including sounder synchronisation.

The unit's integral detector base has easy access for loop cabling and allows for the connection of both the sounder and associated detectors via a single set of cable terminations. The sounder base is EN54-23 compliant.

This sounder base is compatible with Axis-OP, Axis-OH, Axis-HT, Axis-OPX, Axis-OHX and Axis-HTX.

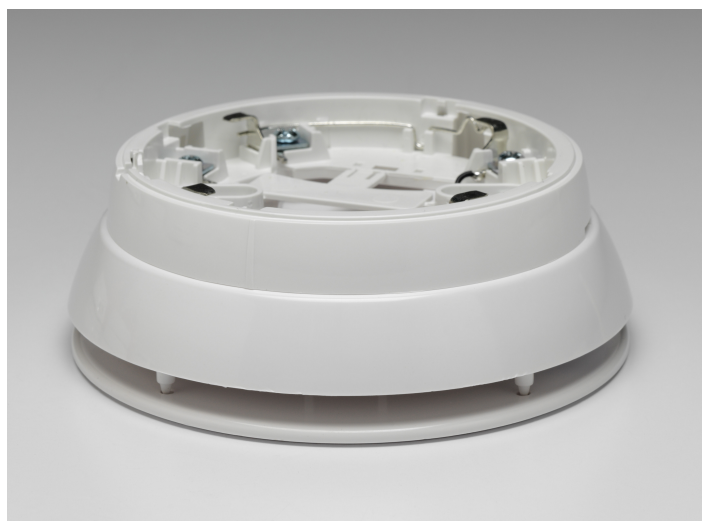

Features

- 32 programmable tones
- Compatible with standard remote activation
- Easy installation and cabling
- Low profile design
- Low current consumption
- Fully intelligent

Standards and Approvals

- EN54-3:2001 +A1:2002 +A2:2006
- Approved by IMQ and certified by the UAE Civil Defence

Specification

Voltage range	From 16 to 40 Vdc (typical 24 Vdc)
Max current load @ 40 Vdc applied, high volume selected	2.5 mA
Max current load 24V applied, high volume selected	3.5 mA
Max current load 16V applied, high volume selected	4 mA
Acoustic output frequency range	From 440 to 2900 Hz
Maximum acoustic intensity	92.6 dB(A)
Ambient temperature range	From -10°C to +55°C
Maximum tolerated humidity	95% RH (without condensation)
IP	21C
Weight	200 g

Order Codes and Options

Axis-S2MB	Intelligent Sounder Base (Plus)
-----------	---------------------------------

[Check if this document is up to date](#) | [Give us feedback](#)

Advanced, The Bridges, Balliol Business Park, Newcastle upon Tyne, NE12 8EW, UK **T:** +44 (0)345 894 7000, **E:** enquiries@advancedco.com,
W: www.advancedco.com

As our policy is one of constant product improvement the right is therefore reserved to modify product specifications without prior notice.