

CPS-B1-2.5-0101



Performance features

- » Compact SHEV control panel, specifically for stairwells
- » Up to 2.5 A total drive current
- » Stabilised output voltage
- » Switchable SHEV safety functions: Fault equal to alarm, SHEV retriggering function and smoke detector remote reset
- » Integrated comfort functions for daily ventilation
- » Optional connection to rain detectors or wind / rain sensors without an additional module
- » Connection of up to 8 SHEV operation panels and 8 fire detectors per line (Only detectors permitted by D+H may be used)
- » Min. 72 hr battery backup supply

Accessories

Batteries




SHEV operation panels



Sensor systems



Example of application

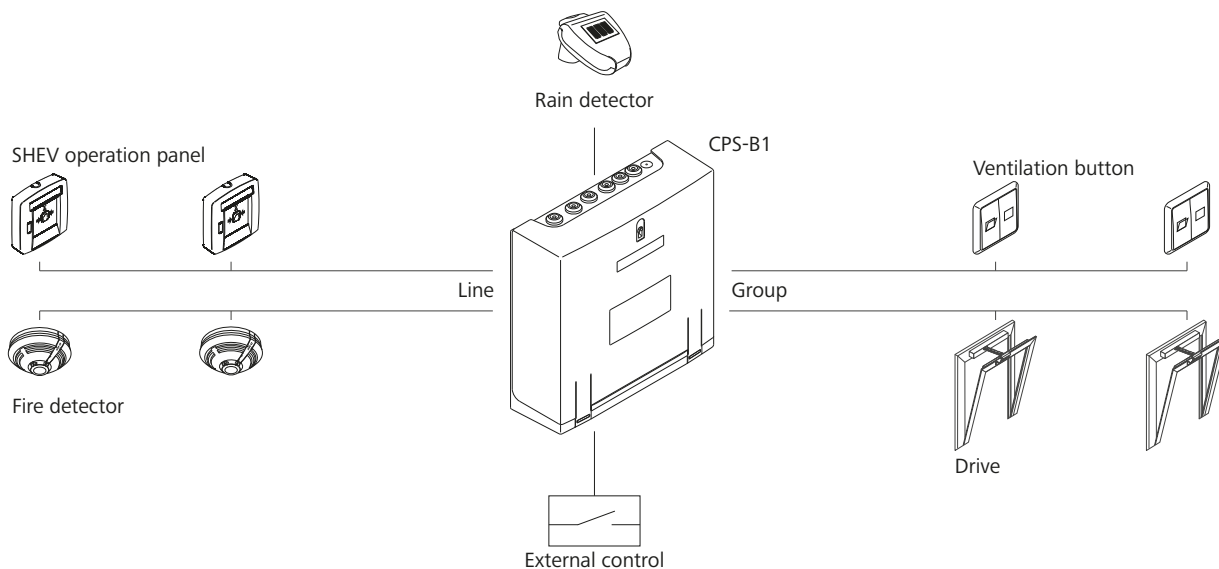

Technical data

	CPS-B1-2.5-0101
Supply	230 V AC / 50 Hz / 140 VA
Stand-by power	< 2 W
Output	24 V DC / 2.5 A
Mode of operation monitoring	Continuous duty
Mode of operation Alarm / Ventilation	Short-time duty 30 % duty cycle
Type of protection	IP 30
Temperature range	-5 °C ... +40 °C
Line / Group	1 / 1
Housing	Plastic
Colour	White (~ RAL 9016)
Battery type	Typ 2 (2x)

Batteries must be ordered separately.

Design

Type	Art. No.	W x H x D	Weight
CPS-B1-2.5-0101	30.119.10	310 x 310 x 104 mm	1.87 kg

Approvals / Certificates

Find out about permission details from your D+H Partner.



G 521003



0786-CPR-50687