



# DC408

## Industrial floor mount contact for garage door, high security grade 3, grey

### Requirements for grade 3 magnetic contacts


---

The grade 3 magnetic contacts are high security contacts which do meet the following requirements: preciseness of opening distance, magnet polarisation, strength of the magnet

### Model with built in EOL resistors available

---

Though built in EOL resistors are not mandatory according to EN50131-2.6 requirements, Interlogix offers a model with built in EOL resistors for a quick installation (see how to Order information)

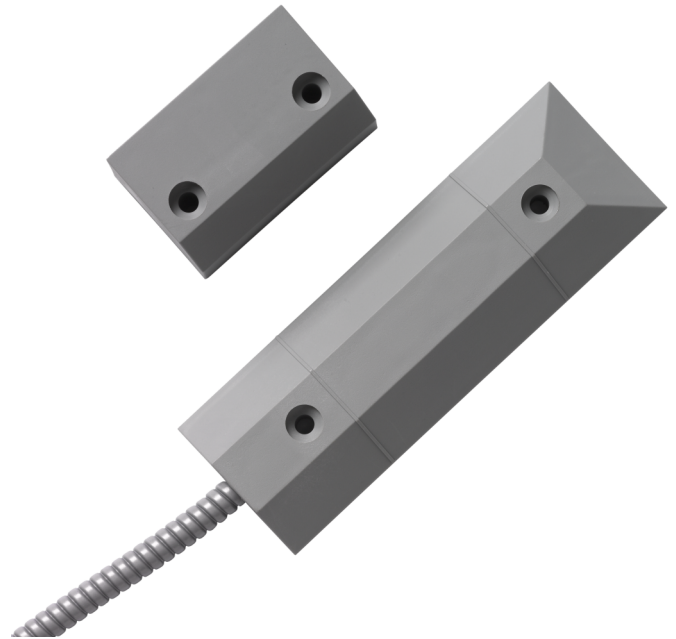

### Details

---

- EN 50131-2-6 Grade 3 and VDS certified
- 2m cable
- Tamper protected

# DC408

Industrial floor mount contact for garage door, high security grade 3, grey

## Technical specifications

---

### General

|                  |  |
|------------------|--|
| Application type | Surface Mount  |
| Contact type     | 1 pin NC contact   |
| Connectivity     | LIYY 4 x 0.14 mm Cu tin-plated; Suitable for LSA IDC method of termination |

---

### Wired/wireless

|                |       |
|----------------|-------|
| Wired-wireless | Wired |
|----------------|-------|

---

### Electrical

|                    |                |
|--------------------|----------------|
| Voltage            | max 100V DC    |
| Contact power      | max 6W or 6 VA |
| Switching current  | max 500mA      |
| Contact resistance | max 0.15 Ohm   |

---

### Physical

|                             |                    |
|-----------------------------|--------------------|
| Physical dimensions         | 66 x 40 x 35 mm    |
| Colour                      | Grey               |
| Material                    | Polyamid GF        |
| Dimensions magnet           | 12 x 55 mm         |
| Dimensions contact / sensor | 144 x 50 x 16.5 mm |
| Operating gap               | 34 mm              |

---

### Environmental

|                       |             |
|-----------------------|-------------|
| Operating temperature | -25 to 70°C |
| IP rating             | IP67        |

---

### Standards & regulation

|               |         |
|---------------|---------|
| EN50131 grade | Grade 3 |
|---------------|---------|

---

As a company of innovation, UTC Fire & Security reserves the right to change product specifications without notice. For the latest product specifications, visit UTC Fire & Security online or contact your sales representative.

