

EN54 GlandBox


More

Tech specs

EN54 LINE

GlandBox

Wiring accessory for control and indicating equipment (CIE)

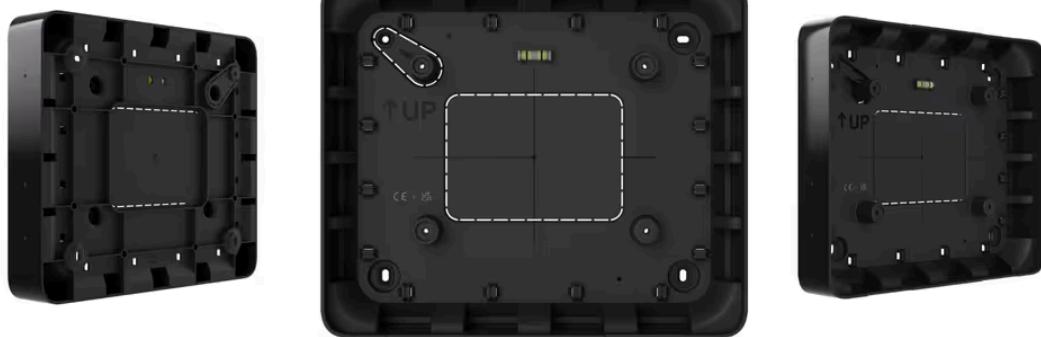

Device compatibility


Check

Key features

Places to install cable glands

16

For routing cables that are not hidden inside the wall. There are four places on each side.

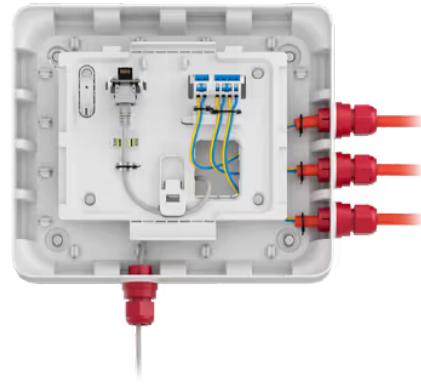


Cable gland diameter

up to 20 mm

Cable glands are not included in the complete set.

Recesses for drilling

The drill bit is fixed in the recess and does not move during drilling. We recommend using a hole saw for plastic with a diameter of up to 20 mm.



Sabotage protection

tamper button

The perforated part of GlandBox is used for the EN54 Fire Hub Jeweller tamper button to trigger when the CIE is installed in GlandBox. An Ajax system sends fault notifications if an attempt is made to detach GlandBox from the surface or remove the CIE from the mounting panel.

[Learn more](#) >



Cable fasteners

To hold the cables together with ties.

Aids for easy installation

- Bubble level
- UP key
- CIE center marking

The bubble level allows for checking the casing inclination angle. The intersection of two lines marks the center of the CIE, and the UP key marks its top.

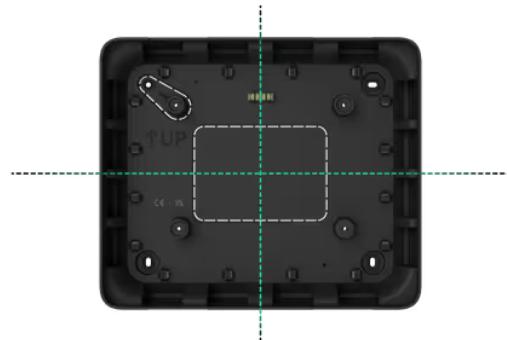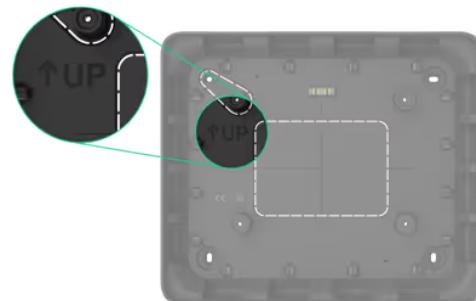

Recommendations

The accessory is designed for indoor use only.

GlandBox is compatible only with [EN54 Fire Hub Jeweller](#).

Product

Dimensions

263 × 223 × 40 mm

Weight

335 g

Operating temperature range

from -10 °C to +40 °C


Operating humidity

up to 75% non-condensing

Flammability rating

UL 94 V-0

Color

Black**White**

Complete set

GlandBox

Installation kit

Quick start guide

Revision

1

Certification and compliance with standards



GlandBox



Additional information

Compliance with standards

[Learn more >](#)

User manual

[Learn more >](#)

Warranty

24 months

[Learn more >](#)

Subscribe

Subscribe to our emails about secure life. No spam.

[Subscribe](#)

Request extra help

 support@ajax.systems

 @AjaxSystemsSupport_Bot

 Send a request



4,000,000

people worldwide under Ajax protection

Rating 4.7

 Suggest a feature

Products

[Intrusion protection](#)
[Video surveillance](#)
[Fire and life safety](#)
[Comfort and automation](#)
[All products](#)
[Services](#)
[System integrations](#)
[Ajax Ready products](#)
[Fibra wired protocol](#)
[Ajax radio protocols](#)

Software

[For users](#)
[Ajax PRO: Tool for Engineers](#)
[Ajax Desktop](#)
[Ajax PRO Desktop](#)
[Ajax Translator PRO](#)
[Ajax Cloud Signaling](#)
[Scenarios](#)



Solutions

[Customer stories](#)
[Solutions by facility type](#)
[Commercial fire detection and alarm system](#)
[Upgrades and retrofits](#)
[Why Ajax](#)
[How it works](#)

Support

[Manuals and articles](#)
[Compliance with standards](#)

Tools

[Ajax device compatibility](#)
[Video storage calculator](#)
[Video device calculator](#)
[Battery life calculator](#)
[Radio communication range calculator](#)
[Switches and outlets configurator](#)
[Fibra power supply calculator](#)
[All web tools](#)

Connecting to CMS

[Intrusion alarm monitoring](#)
[Video monitoring and visual alarm verification](#)
[Audio alarm verification](#)

Company

[Blog](#)
[About us](#)
<https://ajax.systems/products/specs/glandbox/>

For partners

[For partners](#)
[Ajax Academy](#)

[Press page](#)[Partner Portal](#)[Events](#)[Career](#)[Ajax Next](#)[Students at CES 2026](#)[Reviews and feedback](#) [Hrvatska](#) [Privacy policy](#) [Report a vulnerability](#) [GDPR White Paper](#) [NDAA Statement](#) [Cookie policy](#)[Anti-Spam Policy](#) [End user agreement](#) [Warranty](#)

© 2025 AJAX SYSTEMS CH. All rights reserved